

ICONIC
HYBRID FLOORING



 by
PREFERENCE
FLOORS

COLOUR RANGE

ICONIC WPC flooring represents next generation manufacturing techniques utilising sustainable Wood Plastic Composites (WPC) to form a robust, interior waterproof flooring product.


The visual décors provide realistic embossed timber textures and colours in both Australian timber and a classic Oak palette.



SIZE:

1520 x 180 x 7.5MM, 2.189M² / CTN ●

1520 x 228 x 7.5MM, 2.080M² / CTN



Blackbutt ●



Spotted Gum ●



Alabaster



Crystal



Flagstone




Graphite




Jasper



Limestone



Millstone

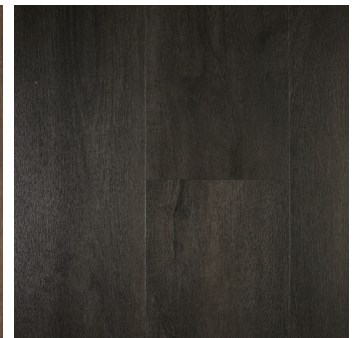

Onyx



Pearl Shell



Red Rock



Smokey Quartz



Tumble Stone



ICONIC WPC HYBRID CLICK FLOORING FOR FLOATING INSTALL

Our ICONIC next generation WPC flooring is dimensionally stable, exceptionally durable, and interior waterproof. Perfect for modern housing, retail, and commercial fit-out.

ICONIC is coated with a scratch resistant water-based PU coating for everyday wear and tear. ICONIC planks also feature an attached acoustic foam layer that delivers excellent noise reduction in-room and for transmission sound between floors.

STANDOUT LOOK, AMAZING FEATURES



Interior Waterproof, can be installed in wet areas including bathrooms and laundry.



Smart looking visual décors. WPC flooring provides good dimensional stability with Click profile for easy install.



Suitable for renovations over existing ceramic tiles, minimal telegraphing.



Excellent installed acoustic performance. Acoustic test rated, 43 L'nT,w - AAAC 5 Star.



Super width planks, 228mm for Oak and 180mm for Australian Timber décors.

TECHNICAL SPECIFICATIONS

ACOUSTIC

Attached 1.5mm acoustic underlay to enhance walking comfort and minimise impact and transmission sound.

DESCRIPTION & PROFILE

WPC construction. Patented Click profile. Micro Bevel edges, V4.

SURFACE FEATURES

Realistic timber visuals, colours, and textures. Water based PU Matte coating.

SLIP RATING

AS 4586:2013 Appendix A, Wet Pendulum P3 & Oil-Wet Inclining Test R10.

FIRE TEST

CHF Value 9.6Kw/m². Smoke Value 304% min.

VOC EMISSIONS

< E1, FloorScore Certified SCS-EC10.3-2014 v3.0.



Front Cover | **RED ROCK** Back Cover | **SPOTTED GUM**

Preference Floors (SA)

Adelaide
t +61 8 8262 2774
sa@preferencefloors.com.au

Preference Floors (WA)

Perth
t +61 8 9471 7785
wa@preferencefloors.com.au

Preference Floors (QLD)

Brisbane
t +61 7 3875 1688
qld@preferencefloors.com.au

Preference Floors (NSW)

Sydney
t +61 2 9738 1188
sales@preferencefloors.com.au

Preference Floors (VIC)

Melbourne
t +61 3 9794 5111
vic@preferencefloors.com.au

PREFERENCE  FLOORS
www.preferencefloors.com.au